
G 1016

DUCTILE IRON DISMANTLING JOINT

PN16

www.ecivalve.it



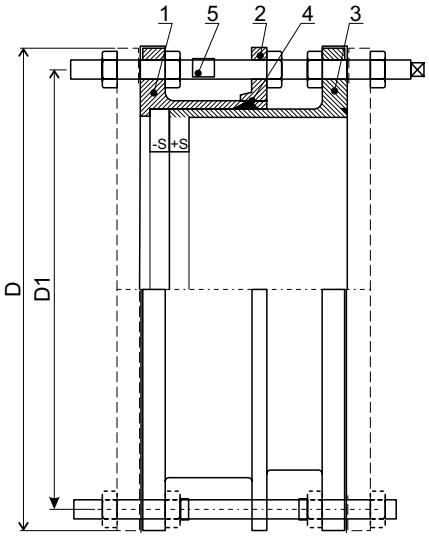

Materials

No.	DESCRIPTION	MATERIAL	STANDARD
1	Body	Ductile Iron	GGG50
2	Gland	Carbon Steel	S235JR
3	Extension Tube	Carbon Steel	S235JR
4	Seal Ring	NBR	NBR
5	Bolt&Nut	Carbon Steel	S235JR

Specifications:

- FACE TO FACE ACCORING TO BS EN 558-1
- FLANGED DRILLED ACCORDING TO EN 1092-2
- MAX WORKING PRESSURE: 16 BAR
- WORKING TEMPERATURE: -20°C-80°C
- SUITABLE MEDIUM: WATER, WASTEWATER
- COATING: FUSION BONDED EPOXY COATED MIN 250µm

Dimensions (mm)

DN	INCH	OD	BCD	THICKNESS	HOLES	LENGTH	BOLT LENGTH	EXPANSION LENGTH	WEIGHT (KG)
50	2"	165	125	19	19*4	200	330	20	9.5
65	2 1/2"	185	145	19	19*4	200	330	20	10.9
80	3"	200	160	19	19*8	200	330	20	13.8
100	4"	220	180	19	19*8	200	330	20	17
125	5"	250	210	19	19*8	200	330	20	21
150	6"	285	240	19	23*8	200	340	20	27.25
200	8"	340	295	20	23*12	200	340	20	38.6
250	10"	405	355	22	28*12	200	340	20	65
300	12"	460	410	24.5	28*12	220	370	25	73
350	14"	520	470	26.5	28*16	220	370	25	105
400	16"	580	525	28	31*16	220	380	25	119
450	18"	640	585	30	31*20	220	380	25	144
500	20"	715	650	31.5	34*20	230	400	25	188
600	24"	840	770	36	37*20	250	440	25	250
700	28"	910	840	39.5	37*24	250	440	25	310
800	32"	1025	950	43	41*24	360	580	30	430
900	36"	1125	1050	46.5	41*28	360	580	30	480
1000	40"	1255	1170	50	44*28	370	600	30	630
1200	48"	1485	1390	57	50*32	390	650	30	1000

All data, descriptions and pictures contained in this leaflet may be subject to change without prior notice.
European Casting Industry Srl | Via Morimondo, 26 - Building 17a | 20143 Milan MI, Italy | P.Iva: 03228761205
www.ecivalve.it | info@ecivalve.it